



## Angu/R

Colour: RAL 6018 [00]\*

Connection: [72]


\* non- standard colour



# Angu\R

Supplied as standard in white 01 with 71 connection. Valves shown in the photo are optional and charged separately.


<b>Type :</b>	AAN\R - vertical radiator
<b>Material:</b>	low carbon steel
<b>Construction:</b>	collector profile 35 x 35 pipe profile 30 x 20
<b>Work pressure:</b>	up to 1,0 MPa
<b>Work temperature:</b>	up to 95°C
<b>Standard equipment:</b>	plug premium ½", air vent premium ½" radiator bracket Z 20
<b>Finishing:</b>	Standard colour white [01]
<b>Threads:</b>	½" Gw

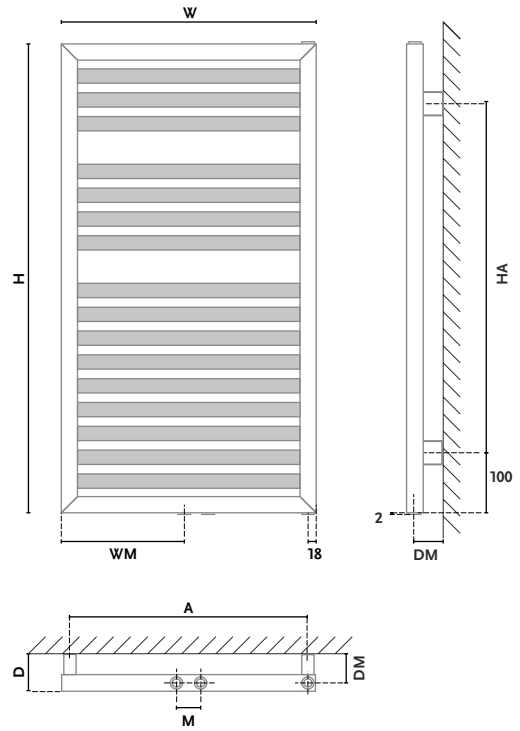

## STANDARD



## OPTION

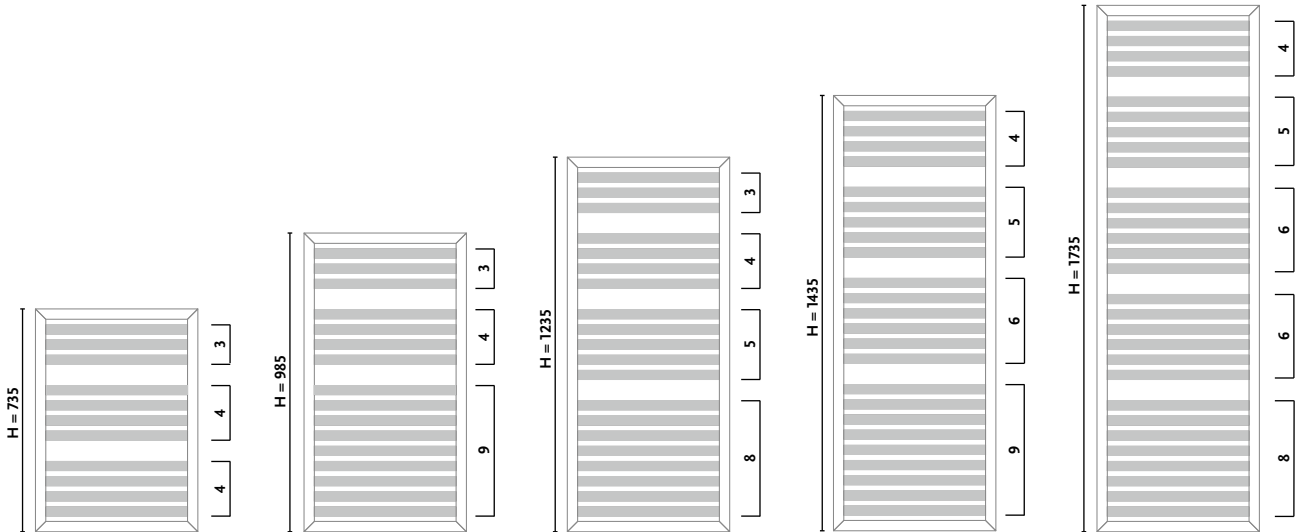

## ANGU\R

	H [mm]	W [mm]	D [mm]	DM [mm]	M [mm]	A [mm]	HA [mm]	INDEKS	n	55/45/20°C [W]	75/65/20°C [W]	e [W]
<b>AAN\R 75/55</b>	735	535	77	60	50	500	635	1011514284 <b>7101</b>	1,2326	204	383	300
<b>AAN\R 95/55</b>	985	535	77	60	50	500	885	1011514285 <b>7101</b>	1,2390	267	503	300
<b>AAN\R 125/55</b>	1235	535	77	60	50	500	1135	1011514286 <b>7101</b>	1,2455	330	623	600
<b>AAN\R 145/55</b>	1435	535	77	60	50	500	1335	1011514287 <b>7101</b>	1,2506	381	721	600
<b>AAN\R 175/55</b>	1735	535	77	60	50	500	1635	1011514288 <b>7101</b>	1,2583	459	872	600

## RECOMMENDED:

VALVE - ANGU in the colour of the radiator for connection [71]



VALVE - CORNER in the colour of the radiator for connection [71]



GOR electric heating element

